

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
1 August 2002 (01.08.2002)

PCT

(10) International Publication Number
WO 02/059732 A1

- (51) International Patent Classification⁷: G06F 3/00, G09G 3/36
- (21) International Application Number: PCT/TB01/02684
- (22) International Filing Date:
19 December 2001 (19.12.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
01200261.4 24 January 2001 (24.01.2001) EP
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors: LONOCE, Giovanni; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). ALBANI, Luigi; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (54) Title: WINDOW BRIGHTNESS ENHANCEMENT FOR LCD DISPLAY
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KB, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

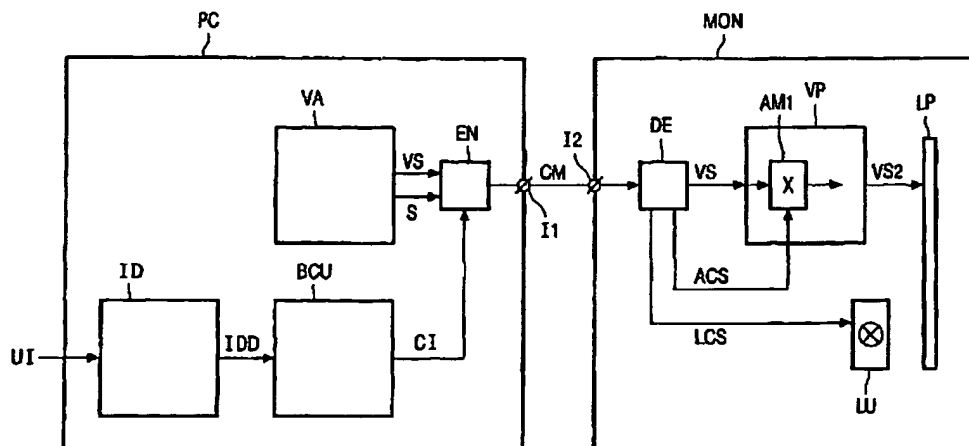

(57) Abstract: An LCD monitor (MON) has an LCD panel (LP) for displaying a display video signal (VS2), and a lighting unit (LU) for illuminating the LCD panel (LP). A personal computer (PC) supplies an input video signal (VS) and a control signal (CI) indicating that the brightness of a portion of the display video signal (VS2) has to be increased. The LCD unit (MON) increases the light output of the lighting unit (LU) by a predetermined amount when the control signal (CI) indicates to do so. The system further comprises an amplitude-modifying means (AM1;AM2;CU) to decrease an amplitude of the video signal (VS;VS2) outside the portion when the control signal (CI) indicates to do so. In this way, it is possible to increase the brightness of the portion of the displayed picture corresponding to the portion of the video signal with respect to the rest of the displayed picture.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Window brightness enhancement for LCD display

The invention relates to a system for and a method of increasing the brightness of a portion of a video signal to be displayed on a Liquid Crystal Display (further referred to as LCD) monitor, to a computer, and to an LCD monitor.

5

EP-A-957631 discloses a system of a monitor and a computer. The computer generates display data to be displayed on the monitor, and coordinates which determine a window of the display data. If the display data in the window is video information with a relatively low bandwidth (a photograph or film), its brightness is increased to improve the visual impression. The brightness and colorimetry of the video data outside the window is kept constant. This feature provides the user with a computer monitor which displays real-life pictures like photos or video-clips substantially with the same contrast and brightness as in a TV set. The brightness of video information in other windows comprising text is not increased to prevent the readability of the text from decreasing due to a too large spot of the electron beams in the cathode ray tube. This prior art is concerned with the transfer of the coordinates of the window from the computer to the monitor.

LCDs produce a picture on the LCD-screen by controlling a transparency or reflectivity of the LCD-cells in accordance with a video signal to be displayed. A lighting system produces the light passing through or reflected by the LCD-cells. An LCD-cell becomes transparent or reflective to a smaller or larger extent, depending on the electric voltage applied across it.

In a monitor provided with a cathode ray tube, overdriving the cathode in the selected areas increases the light output on the screen of the cathode ray tube at the positions of the selected areas. However, it is very difficult to drive the lighting system of an LCD monitor to locally increase its light output at the position of an arbitrary area.

It is an object of the invention to provide a solution for increasing the light output in a selected area of matrix displays like LCDs or DMDs (deflectable mirror devices).

To this end, a first aspect of the invention provides a system for increasing the brightness of a portion of a video signal as defined in claim 1. A second aspect of the invention provides a computer supplying the signals required to enable an LCD monitor to increase the brightness of a portion of a video signal as defined in claim 13. A third aspect of the invention provides an LCD monitor adapted to be able to increase the brightness of a portion of a video signal as defined in claim 15. A fourth aspect of the invention provides a method of increasing the brightness of a portion of a video signal as defined in claim 16. Advantageous embodiments are defined in the dependent claims.

The invention is based on the recognition that the brightness level which is achievable with most of the latest LCD-panels and the corresponding lighting units exceeds the real needs of the user for displaying computer pictures. Nowadays it is easy to find LCD-panels with an output brightness of more than 250 nits. Even panels with 400 nits are available on the market. However, extensive market research has proved that the typical user, when displaying computer pictures, sets the brightness at a level which is not higher than about 170 nits. The invention exploits the difference between the maximum capability of the LCD panel and the real need of the user for displaying computer pictures.

The amount of light produced by the lighting system cannot be changed dynamically across the screen as in the case of the CRT. Instead of highlighting the selected areas or window(s), the driving electronics will dim the rest of the screen (comprising synthetical pictures such as text) to, for example, 170 nits, and a control signal is sent to the monitor to increase the light output of the lighting system to, for example, its maximum brightness. As an example, an LCD panel that is able to produce 300 nits will produce an output brightness of 300 nits in the selected window(s) and 170 nits on the rest of the screen showing synthetical pictures like spreadsheets or graphics. It should be clear that all the numbers mentioned above are intended to be examples only, and may differ for different screen sizes, or for different users having different tastes.

In a system in accordance with the invention, an LCD unit, for example an LCD monitor, has an LCD device or panel for displaying a video signal, and a lighting unit for illuminating the LCD device. A signal-generating unit, for example a personal computer, supplies the video signal and a control signal indicating that the brightness of a portion of the displayed video signal has to be increased. The LCD unit increases the light output of the lighting unit by a predetermined amount when the control signal provided by the signal-generating unit indicates to do so. The system further comprises an amplitude-modifying means to decrease an amplitude of the video signal outside the portion when the control

signal indicates to do so. As will become clear from further embodiments, the amplitude-modifying means may be positioned in the signal-generating unit or in the LCD unit. If the amplitude-modifying means is positioned in the signal-generating unit, the control information provided by the signal-generating unit only needs to comprise information to control the lighting unit to change the amount of light produced. If the amplitude-modifying means is positioned in the LCD unit, the control information provided by the signal-generating unit needs to comprise information to control the lighting unit to change the amount of light produced and further information to indicate when (or where on the screen) the amplitude-modifying means has to adapt the amplitude of the video signal. The portion corresponds with an area on the LCD device.

In an embodiment of the invention as defined in claim 2, the LCD unit comprises a video-processing circuit which receives an input video signal to supply a display video signal to the LCD device. The signal-generating unit comprises a video adapter (also generally referred to as graphics adapter, or video card) to supply the input video signal, and a control unit for generating the control information.

In an embodiment of the invention as defined in claim 3, the amplitude-modifying means has been adapted to decrease an amplitude of the video signal outside the portion when the control signal indicates to do so, so that the light output (and, if desired, the color attributes) of the display video signal not belonging to the portion are kept substantially constant. The portion of the display video signal whose brightness has to be increased corresponds to an area on the LCD screen. This area may be a rectangular window as produced by the operating system Windows ®. The area may have any other shape. The area may even consist of background information between the characters of a text.

In an embodiment of the invention as defined in claim 4, the amplitude-modifying means comprises a controllable amplifier which controls an amplitude of the input video signal in response to the control signal.

In an embodiment of the invention as defined in claim 5, the amplitude-modifying means is present in the computer. A suitable graphics adapter is used which, for example comprises a multiplying digital-to-analog converter and a color LUT (Look-Up Table). This multiplying digital-to-analog converter may be controlled to locally decrease the amplitude of the video signal. The look-up table may be implemented in the usual way by storing values in a memory. The video signal (usually the three RGB signals) is multiplied by the factor stored in the memory. The memory is addressed in dependence on the desired correction to supply the corresponding factors. This embodiment has the advantage that the

information determining the area where the amplitude of video information should be decreased need not be incorporated in the control signal provided from the computer to the monitor.

In an embodiment of the invention as defined in claim 6, again, the amplitude-modifying means is present in the computer. Now, the calculating unit, which may be a
5 microprocessor, may adapt the data in the memory of the graphics adapter to locally decrease the amplitude of the video signal under software control.

In an embodiment of the invention as defined in claim 7, the microprocessor generates the control signal in response to a user input command. For example, the user may
10 indicate the amount by which the light output of the lighting unit has to be increased. Alternatively, the user may indicate which predetermined area or window has to be highlighted.

In an embodiment of the invention as defined in claim 8, the computer comprises an encoder for encoding the control signal in such a way that the control signal can
15 be efficiently transferred to the monitor. Preferably, the control signal is encoded in the video signal(s) or the synchronization signal(s). In this way, the control signal is transferred via the standard interface between the computer and the monitor. Usually, the video signals comprise the R, G and B signals. The control signal may be a signal comprising information on the amount of light to be produced by the lighting system, and information about the areas of the
20 picture that have to be highlighted, or complementary information indicating in which areas the amplitude of the video signal has to be decreased to keep the brightness displayed substantially constant. These areas may be indicated by its coordinates. The monitor comprises a decoder to retrieve the control information to control the lighting system and the amplification factor of the controllable amplifier and/or LUT if present in the monitor.

25 It may be possible for the user to control the increase of the light output of the lighting system to a value which is lower than the maximum value.

The invention may be based on the same activation and communication method as described in Applicant's docket PHN17.784 which constitutes a non-prepublished patent application. As soon as application software (further referred to as LightFrame) in the
30 computer is launched, the computer sends the coordinates of the selected window(s) that comprise(s) the picture to be enhanced to the monitor via the video cable using a proprietary protocol. In the monitor, a decoder translates this information comprising spatial coordinates, into proper information that will be used by the monitor circuitry to apply video processing only in that selected area. It is also possible to perform the video processing in the computer.

The selection of the window(s) may either be made manually by the user by clicking on the window to be selected after activating the feature, or automatically through a proper algorithm.

These and other aspects of the invention are apparent from and will be
5 elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 shows a basic block diagram of an embodiment of a system in
10 accordance with the invention, and

Figs. 2 to 4 show block diagrams of embodiments of a system in accordance with the invention.

Fig. 1 shows a basic block diagram of an embodiment of a system in
15 accordance with the invention.

A signal-generating unit PC supplies a video signal VS and control information CI to an LCD unit MON. The signal-generating unit PC may be a personal computer. The LCD unit MON, which may be a computer monitor, comprises an LCD device LP to display the video signal VS, and a lighting unit LU with a lamp to illuminate the
20 LCD device LP. The lighting unit LU may further comprise a switched-mode power supply (not shown) to supply power to the lamp. The lighting unit LU is controlled by the control information CI to increase an amount of light produced by the lamp if a portion of the video signal VS should be displayed with a higher brightness.

The system further comprises a video amplitude-modifying means
25 AM1;AM2;CU (see Figs. 2, 3 and 4) to decrease an amplitude of the video signal VS outside the portion in response to the control information CI, if a portion of the video signal VS should be displayed with a higher brightness.

In this way, when the amount of light produced by the lighting unit is increased and the video amplitude of the video signal is decreased for the portion of the video
30 signal which should not be displayed with the higher brightness, the system increases the brightness of a predetermined portion of the video signal VS.

The control of the lighting unit may be realized by changing the operating frequency of a switching inverter that powers the lamp.

In an embodiment, the amplitude-modifying means adjust the brightness of the video signal VS by digitally multiplying each video color signal R,G,B (not shown) of the video signal VS by a number ranging from 0 to 1. If the multiplication factor is 1, the brightness will be at its maximum level. If it is 0, the picture will be black. If the multiplication factor is the same for the three color signals, the color temperature of the picture is supposed to stay approximately the same and only the amount of output light (the light produced by the LCD device) is changed. In practice, it might be required to adapt the multiplication factors of the different color signals differently to keep the color temperature constant. It is also possible to change the color temperature of the picture deliberately.

The operation of the system will now be elucidated by way of example. Let it be assumed that a user is working on a spreadsheet with an output light of 170 nits. At a certain time, the user opens a window showing a video clip, and an application in the computer PC (further referred to as LightFrame) is activated. In order to accomplish the brightness enhancement function in the window displaying the video clip, as soon as

LightFrame is launched, the following steps are performed at substantially the same time:

the computer PC produces the control information CI to indicate that the brightness should be increased,

the lighting unit LU will increase its light output in response to the control information CI indicating to do so, for example to a level of 300 nits,

the level of brightness of the video signal VS is stored temporarily in a memory,

the control information CI is decoded in the LCD unit MON and the position of the window showing the video clip is identified,

the three color signals related to the area outside the window (in this example this is the spreadsheet) are multiplied by a factor K_r , K_g , K_b in such a way that the brightness of that area is brought to 170 nits and the color temperature is brought to the same value as before increasing the light output of the lighting unit LU.

If all the steps indicated are accomplished in a limited time period, the user will just perceive the brightness increase of the window showing the video clip.

When LightFrame is deactivated, the electronics will have to follow the reverse path, performing the following actions:

the video signals are multiplied by 1,

the light output of the lighting unit LU decreases in such a way that the output brightness is at the same level as before LightFrame was activated. This brightness level is retrieved from the memory.

In this case the user will just perceive the decrease of brightness inside the
5 window showing the video clip.

The invention is not limited to the example described above. It is possible to decrease the amplitude of the video signal VS by an amount that is smaller or larger than the amount by which the light output of the lighting unit increases. It is, however, essential that the brightness in the area to be highlighted (for example, a window showing the video clip) is
10 higher than in another area (for example, the window showing the spreadsheet)

Fig. 1 shows that the video signal VS and the control information CI are separately provided at an interface I1 of the computer PC to be transported to an interface I2 of the LCD monitor. It is also possible to transport both the video signal VS and the control information CI through the same connections, as is shown in Fig. 2. Both the computer PC
15 and the monitor MON may be separate apparatuses, and the interfaces I1 and I2 are interconnected by a cable, for example a standard VGA or DVI cable. Both the computer PC and the monitor MON may also be present in the same physical entity, while the interfaces I1 and I2 might not be actually physically present other than as a conductive connection.

Fig. 2 shows a block diagram of an embodiment of a system in accordance
20 with the invention. In Fig. 2, the signal-generating unit PC which is a personal computer comprises a video adapter VA which supplies the input video signal VS and synchronization signals S, and a control unit BCU which generates the control information CI. The video adapter VA as such is generally known from personal computers. The control circuit BCU may be a suitably programmed microprocessor. In the embodiment of the invention as shown
25 in Fig.2, the computer PC further comprises an input device ID and an encoder EN. The input device ID receives user input UI to supply a user command IDD to the microprocessor in the control unit BCU. For example, the user input may be a mouse click indicating a window whose brightness should be increased, and/or an amount by which the brightness should be increased. The encoder EN encodes the control information on the video signals VS and/or
30 the synchronization signals S to obtain a coded signal CM on the interface I1. An embodiment of a possible coding scheme as such is known from US-A-5,550,556.

The LCD unit MON receives the coded signal CM on the interface I2 which is connected to the interface I1 by a standard VGA/DVI cable. The LCD unit MON comprises a decoder DE which decodes the video signal VS (usually the RGB signals) and the control

information CI from the coded signal CM. The control signal CI may be decoded to obtain a first control signal ACS to control a controllable amplifier AM1, and a second control signal LCS to control a lighting unit LU. A video-processing circuit VP comprises the amplitude-modifying means AM1 which is a controllable amplifier or a LUT, as is known, for example, from a contrast control. The amplitude-modifying means AM1 receives the input video signal VS and the control signal ACS to supply a display video signal VS2 to the LCD device LP. The amplitude-modifying means AM1 controls the amplitude of the display video signal VS2 in response to the control information ACS. The LCD unit further comprises a lighting unit LU which receives the control information LCS to control the amount of light illuminating the LCD device LP. The embodiment in accordance with the invention shown in Fig. 2 operates in the same way as the embodiment in accordance with the invention shown in Fig. 1. The computer PC indicates with the control information CI that a predetermined area of the displayed picture has to be displayed with a higher brightness. Therefore, the control information CI may comprise a command LCS indicating to the lighting unit LU to increase its light output in the whole area of the displayed picture, and the information ACS about the time of occurrence or the position of the predetermined area, so that the amplitude-modifying means AM1 is correctly controlled to decrease the amplitude of the video signal VS2 outside the predetermined area and the brightness outside the predetermined area is lower than inside the predetermined area.

The information ACS may also comprise information on the amount of the light output that has to be increased. An example of the information that can be transferred in such a way that the monitor MON is able to correctly determine the area to be highlighted is described in Applicant's docket PHN17.784 which constitutes a non-prepublished patent application.

Fig. 3 shows a block diagram of an embodiment of a system in accordance with the invention. In Fig. 3, the signal-generating unit PC which is a personal computer comprises a video adapter VA which supplies the input video signal VS and synchronization signals S, and a control unit BCU which generates the control information CI. The video adapter VA comprises a video memory VM and the amplitude-modifying means, which is a controllable amplifier AM2. The control circuit BCU may be a suitably programmed microprocessor. The microprocessor writes (or commands to write) the video information VDI in the usual way into the video memory VM. The amplitude of the video information VD read from the video memory VM is controlled by the controllable amplifier AM2 under

the control of the control signal CI. The controllable amplifier AM2 controls the amplitude of the video signal VS in response to the control information CI. The video information VD may be digital data, and the controllable amplifier AM2 may be a digital multiplier or a LUT. The video information VD may be an analog signal, and the controllable amplifier AM2 may
5 be an analog multiplier as known from a contrast control.

The LCD unit MON receives the video signal VS (usually the RGB signals) and the control information CI from the computer PC. A video-processing circuit VP receives the input video signal VS to supply a display video signal VS2 to the LCD device LP. The LCD unit further comprises a lighting unit LU which receives the control information CI to
10 control the amount of light illuminating the LCD device LP. The embodiment in accordance with the invention shown in Fig. 3 operates in the same way as the embodiment in accordance with the invention shown in Fig. 2. The computer PC indicates with the control information CI that a predetermined area of the displayed picture has to be displayed with a higher brightness. Therefore, the control information CI may comprise a command indicating
15 to the lighting unit LU to increase its light output, and information about the time of occurrence or the position of the predetermined area and the amount the amplitude should be decreased, so that the controllable amplifier AM2 is correctly controlled to decrease the amplitude of the video signal VS outside the predetermined area by the correct amount. It is possible to split the control information into two separate control signals: a first control signal
20 indicating to the controllable amplifier AM2 when to decrease the amplitude of the video signal VS, and a second control signal indicating to the lighting unit LU to increase its light output. Now, the communication channel between the monitor MON and the computer PC should be a two-way channel. The amount of light the user was using before activation of LightFrame has to be communicated from the monitor to the computer PC in order to adjust
25 the surrounding area to the same level. Such a communication is possible through the USB bus.

Fig. 4 shows a block diagram of an embodiment of a system in accordance with the invention. In Fig. 4, the signal-generating unit PC which is a personal computer comprises a video adapter VA which supplies the input video signal VS and synchronization
30 signals S, and a control unit BCU which generates the control information CI. The control unit comprises a calculating unit CU which may be a suitably programmed microprocessor. The video adapter VA comprises a video memory VM and an analog-to-digital converter AD. The amplitude-modifying means is realized by modifying the video data VDI written into the memory VM with the calculating unit CU. For example, when the amplitude of the

video signal outside the area where the brightness has to be increased has to be lowered by a factor 0.7, all of the data in the memory is recalculated to 0.7 times its original value. If required, the digital data DD read from the video memory VM is converted into an analog video signal VS. The video adapter VA further provides a synchronization signal S in a usual way.

The computer PC may further comprise an input device ID which receives user input UI to supply a user command IDD to the microprocessor in the control unit BCU. For example, the user input may be a mouse click indicating a window whose brightness should be increased, and/or an amount by which the brightness should be increased.

The LCD unit MON is identical to the LCD unit described with respect to Fig. 3, and is therefore not described again. In this situation, the bi-directional communication between monitor and PC is also required.

The embodiment in accordance with the invention shown in Fig. 4 operates in the same way as the embodiment in accordance with the invention shown in Fig. 3. The computer PC indicates with the control information CI that a predetermined area of the displayed picture has to be displayed with a higher brightness. Therefore, the control information CI may comprise a command indicating to the lighting unit LU to increase its light output, and information about the time of occurrence or the position of the predetermined area, so that the control unit CU is able to recalculate the correct data with the correct factor and to decrease the amplitude of the video signal VS outside the predetermined area. It is possible to split the control information into two separate control signals: a first control signal indicating to the control unit CU when to decrease the amplitude of the video signal VS by which amount, and a second control signal indicating to the lighting unit LU to increase its light output.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claim. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. Use of the verb "to comprise" and its conjugations does not exclude the presence of elements or steps other than those stated in a claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In a device claim enumerating several means, several of these means may be embodied by one and the same item of hardware.

CLAIMS:

1. A system for increasing the brightness of a portion of a video signal (VS), the system comprising:
 - a signal-generating unit (PC) for supplying the video signal (VS) and control information (CI), and
 - 5 an LCD unit (MON) having an LCD device (LP) for displaying the video signal (VS), and a lighting unit (LU) for increasing an amount of light illuminating the LCD device (LP) in response to the control information (CI),
 - the system further comprising a video amplitude-modifying means (AM1;AM2;CU) for decreasing an amplitude of the video signal (VS) outside the portion in
 - 10 response to the control information (CI).
2. A system as claimed in claim 1, wherein:
 - the LCD unit (MON) comprises a video-processing circuit (VP) for receiving
 - an input video signal (VS) to supply a display video signal (VS2) to the LCD device (LP),
 - 15 the signal-generating unit (PC) comprising:
 - a video adapter (VA) for supplying the input video signal (VS), and
 - a control unit (BCU) for generating the control information (CI).
3. A system as claimed in claim 2, wherein the amplitude-modifying means
- 20 (AM1;AM2) is adapted to decrease the amplitude of the display video signal (VS2) outside the portion so that the light output and colorimetry of the display video signal (VS2) not belonging to the portion is kept substantially constant.
4. A system as claimed in claim 3, wherein the amplitude-modifying means
- 25 (AM1;AM2) is adapted to decrease the amplitude of the display video signal (VS2) outside the portion so that also a color of the display video signal (VS2) not belonging to the portion is kept substantially constant.

5. A system as claimed in claim 2, wherein the amplitude-modifying means (AM1) comprise a controllable amplifier for receiving the input video signal to control an amplitude of the input video signal (VS) in response to the control information (CI).
- 5 6. A system as claimed in claim 2, wherein the amplitude-modifying means (AM1) comprise a memory in which a look-up table is stored for receiving the input video signal to control an amplitude of the input video signal (VS) in response to the control information (CI).
- 10 7. A system as claimed in claim 2, wherein the video adapter (VA) comprises the amplitude-modifying means (AM2) for receiving video data (VD) from the video adapter (VA) to control an amplitude of the video data (VD) in response to the control information (CI) to obtain the input video signal (VS3) having an amplitude for a part not corresponding to the portion which is smaller than an amplitude of a part corresponding to the portion.
- 15 8. A system as claimed in claim 2, wherein the video adapter (VA) comprises a video memory (VM), and the control unit (BCU) comprises a calculating unit (CU) suitably programmed to write adapted video data (VDI) into the video memory (VM) to obtain the input video signal (VS3) having an amplitude for a part not corresponding to the portion
- 20 which is smaller than an amplitude of a part corresponding to the portion.
9. A system as claimed in claim 2, wherein the signal-generating unit (PC) comprises an input device (ID) for receiving user input (UI), the control unit (BCU) being suitably programmed to generate the control information (CI) in response to the user input
- 25 (UI) indicating a predetermined amount by which the light output of the lighting unit (LU) has to be increased.
10. A system as claimed in claim 2, wherein the signal-generating unit (PC) comprises an encoder (EN) for supplying the control information (CI) as a coded message
- 30 (CM), and the LCD unit (MON) comprises a decoder (DE) for decoding the message (CM) to obtain a control signal (LCS) supplied to the lighting unit (LU) to increase its light output.
11. A system as claimed in claim 8, wherein the encoder (EN) comprises a video encoder for coding the coded message in the video or synchronizing signal.

12. A system as claimed in claim 9, wherein the coded message (CM) indicates an amount by which the light output of the lighting unit (LU) has to be increased.

5 13. A computer (PC) comprising:
an interface (I1) for connecting an LCD unit (MON),
a video adapter (VA) for supplying a video signal (VS) to the interface, and
a brightness control unit (BCU) for supplying control information (CI) to the
interface, the control information (CI) indicating to a lighting unit (LU) of the LCD unit
10 (MON) that an increase of its light output is requested.

14. A computer as claimed in claim 13, wherein the computer (PC) further
comprises a video amplitude-modifying means (AM2;CU) for decreasing an amplitude of the
video signal (VS) outside a part of the video signal (VS) where the brightness has to be
15 increased.

15. An LCD monitor (MON) comprising
an interface (I2) for receiving a video signal (VS) and control information (CI
from a computer (PC),
20 an LCD device (LP) for displaying the video signal (VS),
a lighting unit (LU) for receiving the control information (CI) to increase an
amount of light illuminating the LCD device (LP), and
a video amplitude-modifying means (AM1) for decreasing an amplitude of the
video signal (VS) outside a part of the video signal where the brightness has to be increased
25 as indicated by the control information (CI).

16. A method of increasing the brightness of a portion of a video signal (VS), the
method comprising the steps of
supplying (PC) the video signal (VS) and control information (CI), and
30 displaying (MON) the video signal (VS) on an LCD device (LP), and
increasing (LU) an amount of light illuminating the LCD device (LP) in response to the
control information (CI),
decreasing (AM1;AM2;CU) an amplitude of the video signal (VS) outside the
portion in response to the control information (CI).

1/3

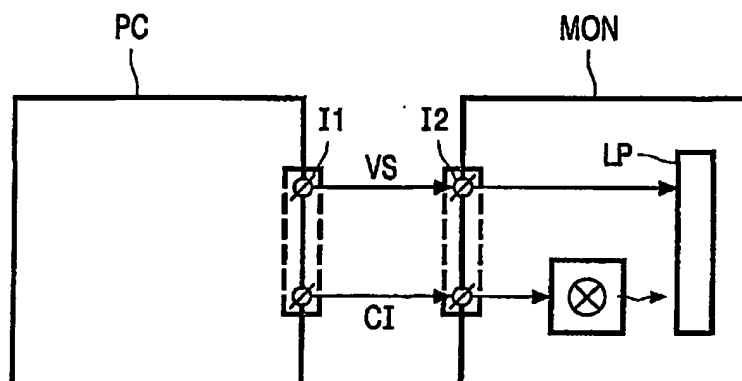


FIG. 1

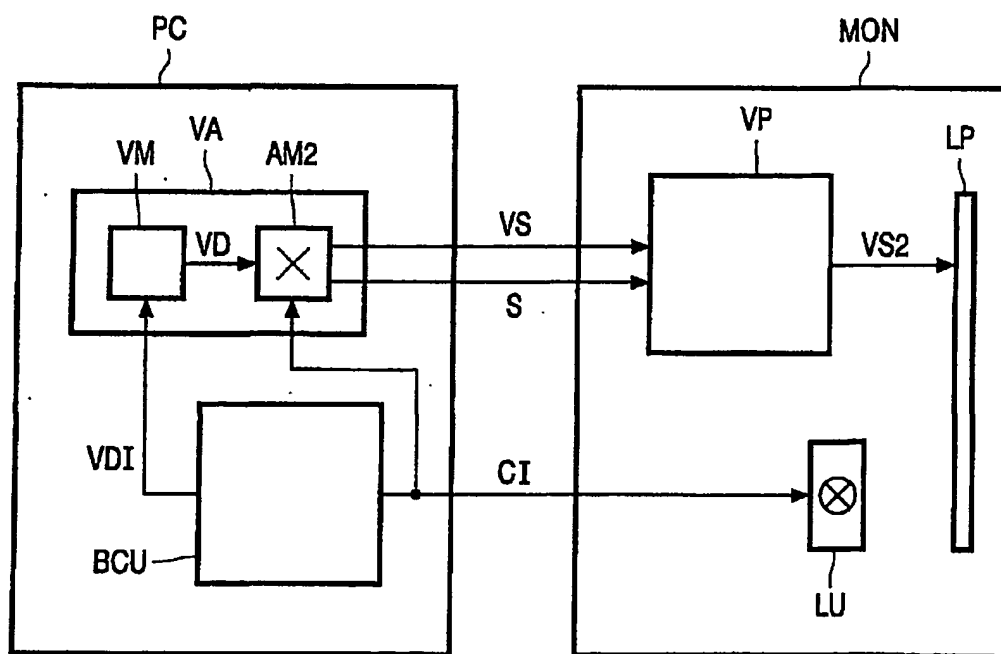


FIG. 3

2/3

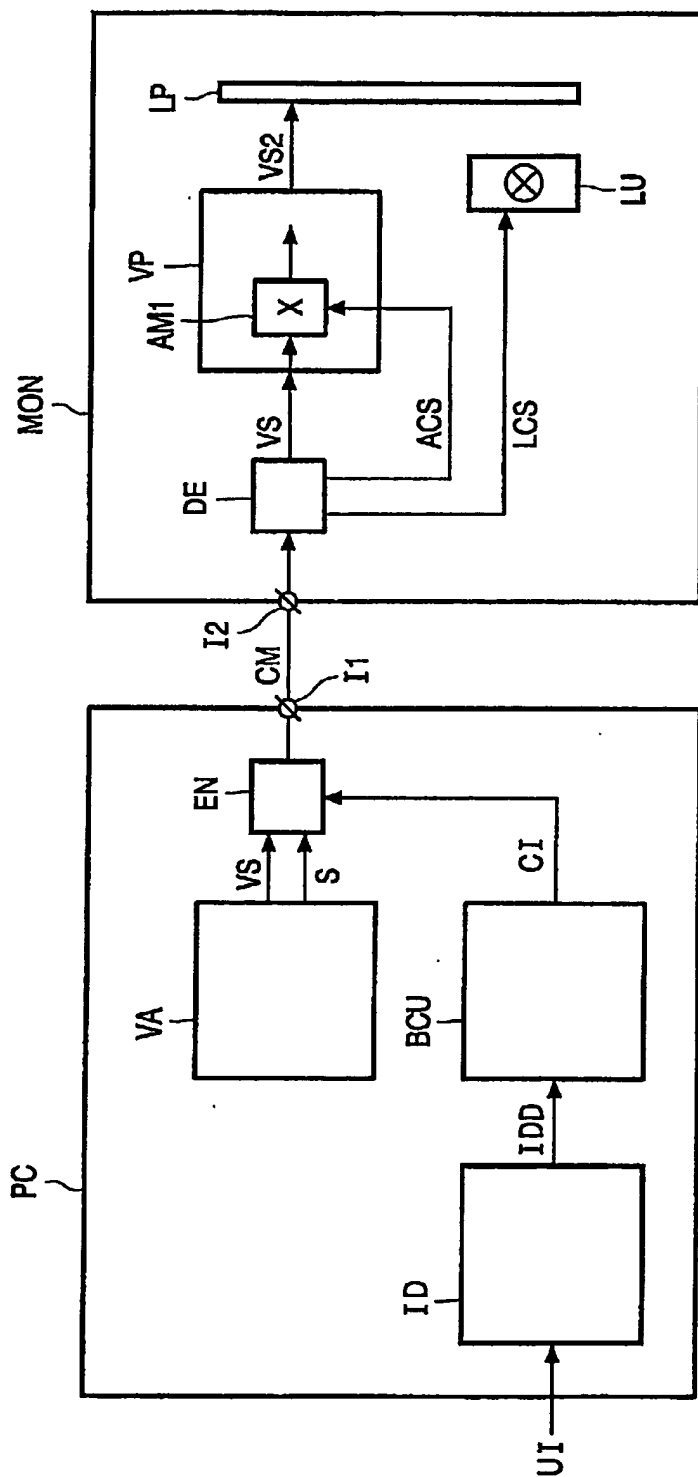


FIG. 2

3/3

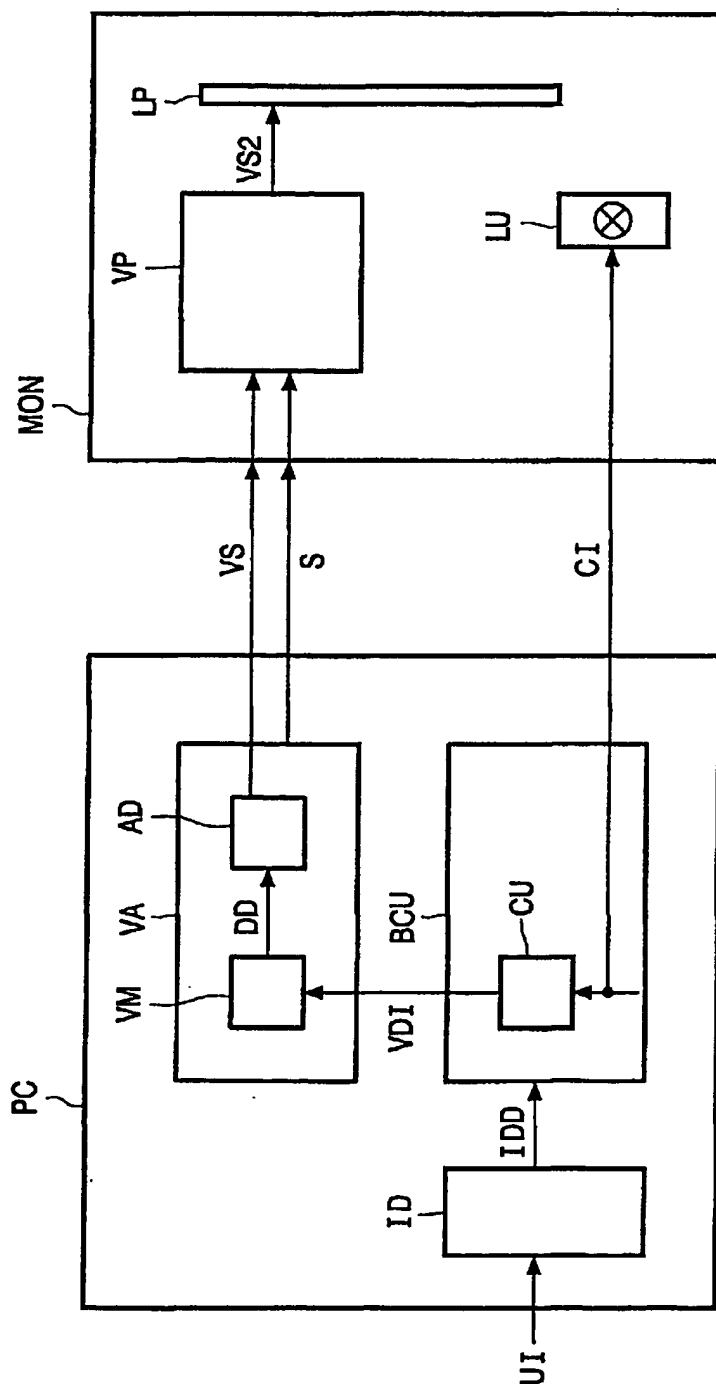


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02684

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 G06F3/00 G09G3/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N G09G G06F H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data, IBM-TDB, COMPENDEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 5 978 041 A (KAWASAKI JIRO ET AL) 2 November 1999 (1999-11-02) abstract; figures 43-58 column 10, line 16 -column 10, line 25	1,13,15, 16 2-12
Y A	WO 99 20042 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS SVENSKA AB (SE)) 22 April 1999 (1999-04-22) page 4, line 1 -page 4, line 31; figures 2,3	1,15,16 2-14
Y A	US 6 121 950 A (MANSELL BARRY ET AL) 19 September 2000 (2000-09-19) abstract; figures 4,10 column 1, line 66 -column 8, line 41	1,13 2-16
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

A document member of the same patent family

Date of the actual completion of the international search

26 March 2002

Date of mailing of the international search report

15/04/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Brandenburg, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02684

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 094 185 A (SHIRRIFF KENNETH W) 25 July 2000 (2000-07-25)	13
Y	abstract; figure 1 column 2, line 52 -column 4, line 9	15,16
A	US 5 638 090 A (DANIEL ANDREW ET AL) 10 June 1997 (1997-06-10) abstract; figure 4 column 4, line 19 -column 4, line 45	1-16
A	US 4 855 812 A (ROKUDA MORITO ET AL) 8 August 1989 (1989-08-08) column 1, line 6 -column 1, line 30 column 2, line 63 -column 2, line 68	1-16

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02684

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5978041	A	02-11-1999	JP 8251503 A	27-09-1996
			JP 8254970 A	01-10-1996
			JP 8123350 A	17-05-1996
			KR 233900 B1	15-01-2000
			JP 8317344 A	29-11-1996
WO 9920042	A	22-04-1999	EP 0945006 A1	29-09-1999
			WO 9920042 A2	22-04-1999
			JP 2001507903 T	12-06-2001
			TW 394923 B	21-06-2000
			US 6239773 B1	29-05-2001
US 6121950	A	19-09-2000	US 5751261 A	12-05-1998
			US 5444557 A	22-08-1995
			US 5317436 A	31-05-1994
			US 5206749 A	27-04-1993
			WO 9410794 A1	11-05-1994
			US 6320568 B1	20-11-2001
			AT 173839 T	15-12-1998
			DE 69322279 D1	07-01-1999
			DE 69322279 T2	24-06-1999
			EP 0659282 A1	28-06-1995
			EP 0853254 A2	15-07-1998
			JP 8501887 T	27-02-1996
			US 5396304 A	07-03-1995
			WO 9407177 A1	31-03-1994
			WO 9525983 A1	28-09-1995
			US 5376979 A	27-12-1994
			US 5705424 A	06-01-1998
			US 5666175 A	09-09-1997
			US 5654811 A	05-08-1997
			US 5713652 A	03-02-1998
			US 6043800 A	28-03-2000
			US 6072445 A	06-06-2000
			US 5743614 A	28-04-1998
			US 5861929 A	19-01-1999
			CA 2126446 A1	05-08-1993
			EP 0647383 A1	12-04-1995
			EP 0935389 A1	11-08-1999
			JP 7503557 T	13-04-1995
			WO 9315589 A1	05-08-1993
			US 5420055 A	30-05-1995
			US 5578865 A	26-11-1996
			US 5661371 A	26-08-1997
			US 5581385 A	03-12-1996
			US 5467154 A	14-11-1995
			US 5475514 A	12-12-1995
			US 5692820 A	02-12-1997
			US 6317175 B1	13-11-2001
			EP 0565588 A1	20-10-1993
			JP 3227156 B2	12-11-2001
			JP 6504139 T	12-05-1994
			JP 2002014375 A	18-01-2002
			US 6232136 B1	15-05-2001
			WO 9212453 A1	23-07-1992
			US 5377031 A	27-12-1994
			US 5539550 A	23-07-1996
			US 5438241 A	01-08-1995

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02684

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6121950	A	US 5362671 A	08-11-1994
		US 6143582 A	07-11-2000
		US 5702963 A	30-12-1997
		US 5583335 A	10-12-1996
US 6094185	A	25-07-2000	NONE
US 5638090	A	10-06-1997	WO 9617338 A1
			06-06-1996
US 4855812	A	08-08-1989	JP 1995605 C
			08-12-1995
			JP 7020251 B
			06-03-1995
			JP 63178688 A
			22-07-1988
			JP 63153973 A
			27-06-1988